

# 51.2V 100Ah LiFePO4 Powerwall Home Energy Storage Battery

51.2V 100Ah

ES Box 1



## South African Market

Grenex battery BMS supports simultaneous communication and docking with multiple inverter brands



## Super Points: ONE Battery For Multiple Brand Inverters

### Product advantages

#### Long cycle life

Using high-quality lithium iron phosphate batteries, the cycle life is more than 6000 times at 80%DOD, and can be used for 10-15 years



#### High quality prismatic lithium iron phosphate battery

Higher capacity, higher current, longer life

#### Low internal resistance and high current

Low internal resistance of the battery, excellent continuous high current discharge performance

#### Intelligent BMS battery protection

Built-in intelligent BMS (battery management system), effectively avoiding overcharge, overdischarge, overcurrent, short-circuit, balance and other problems



#### Communicated with multiple brands inverter same time

genixgreen's battery BMS supports simultaneous communication and docking with multiple brands inverter

#### Good safety performance

Extreme safety test, no fire, no explosion, no leakage

# 51.2V 100Ah LiFePO4 Powerwall Home Energy Storage Battery

## KEY FEATURES

- ★ Automotive Grade Cells-16 cell configuration
- ★ Integrated CAN bus RS485 BMS.
- ★ LED display shows battery Power.
- ★ Pre-configured with optimal parameters.
- ★ No other LiFePO4 battery offers this functionality, longevity and warranty at our price.
- ★ Communicated with inverter brand: SMA, Studer, Solar-Edge, Schneider, DEYE, Solis, Sungrow, Growatt, Sofar, Must, Sol-Ark, Sunsynk and etc.

## Protection


- ★ Over charge detection function
- ★ Over discharge detection function
- ★ Over current detection function
- ★ Temperature protection function
- ★ Short circuit detection function
- ★ Balance function

## Parameters


Product model	ES Box - 1
Product specification	51.2V100Ah
Nominal voltage	51.2V
Nominal capacity	100Ah
Cell type	(LFP)
Standard charge voltage	58.4V
Max charge current	100A
Discharge cut-off voltage	40V
Max discharge current	100A
Parallels Function	Support 15 units in parallels
Communication interface	RS485、RS232、CAN(Optional)
Cycle life	≥ 6000 Cycles (80%DOD)
Charge temperature range	0~65°C
Discharge temperature range	-20~65°C
Colour	(Grey and white)
Dimensions	600*500*145MM
Weight	55Kg
Installation method	(Wall mounted)

## Charging and Discharge curve

● Charge and discharge @0.5C 25°C

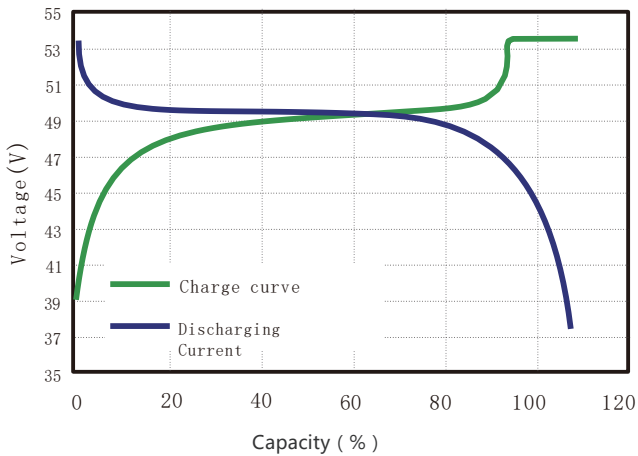


● Charging Characteristics @0.5C 25°C

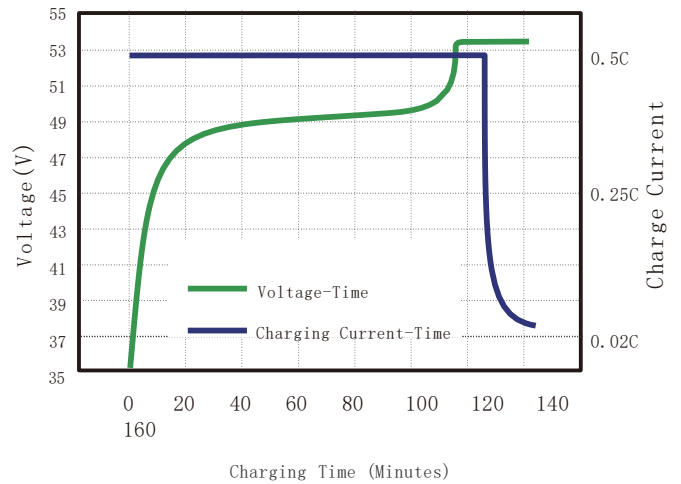


## Different current/Temperature Discharge curves

● Different Rate Discharge Curve @25°C

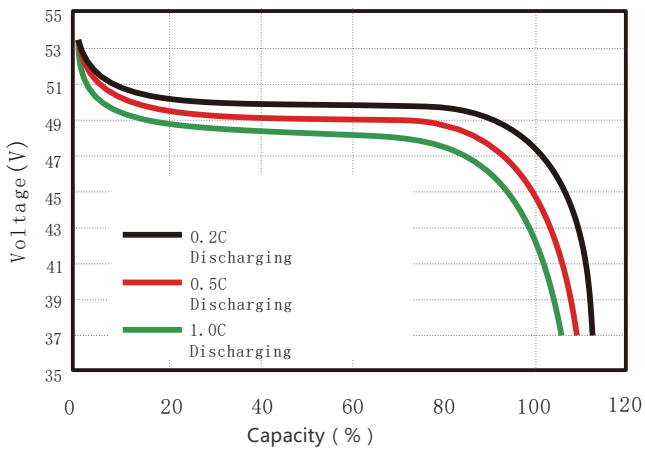

● Different Temperature Discharge Curve @0.5C

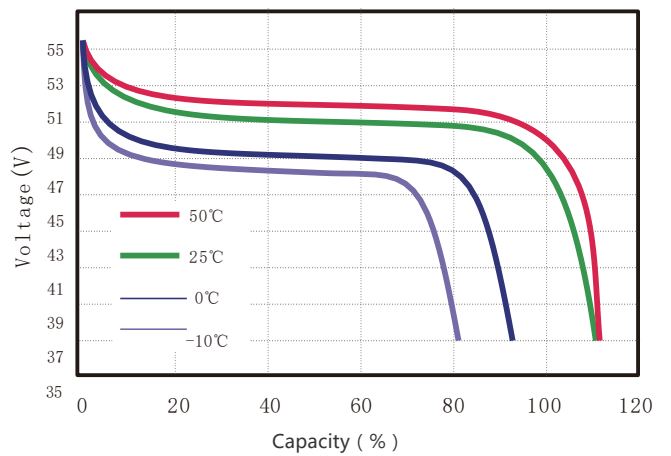

# 51.2V 100Ah LiFePO4 Powerwall Home Energy Storage Battery

